


HJE-A/B/C专业型/标准天平

HJE-A/B/C professional, standard balance

主要性能特征 CHARACTERISTIC

- 外部校准功能
External CAL Function
- 六级防震滤波可调功能
Six Level Adjustable Function
- 称重稳定时间可调功能
Weighing Stableness Time Adjustable
- 具有克、克拉、盎司等15种可屏蔽单位
15 Unite Shield: g, ct, lb, oz, ozt, GN, dwt, N, t, T/A/R.....
- 开关机自动锁定当前模式
Default Weighing Mode Automatically
- 电池驱动
Battery Back Up
- 电池驱动
Battery Back Up
- 选配下挂钩称重装置
With Under Hook
- 选配内置直流可充电功能
Optional fit with inner rechargeable DC battery
- 选配RS232通讯端口连接外围设备
Fit with RS232 Line
- 选配外接显示器功能
Optional fit with extra display

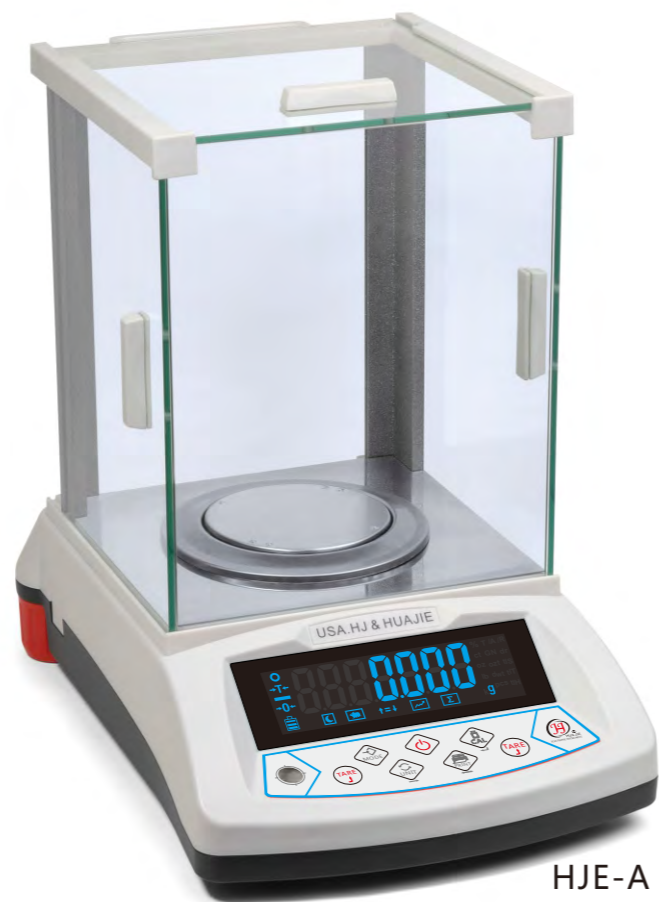

HJE-A

称量应用模式 APPLICATION MODE

- 百分比称重功能
Percentage Weighing Function
- 动物称量功能
With Dynamic Weighing Function
- 设定物体称量计数功能
Selectable Weighing and Counting Mode
- 上下限检重功能
High-low Weighing Function
- 峰值保持功能
Peak Holding Function
- 累计功能
Accumulate Function



HJE-C

HJC-A/B/C专业型/标准天平

HJC-A/B/C professional, standard balance

主要性能特征 CHARACTERISTIC

- 外部校准功能
External CAL Function
- 称重稳定时间可调功能
Weighing Stableness Time Adjustable
- 具有克、克拉、盎司等15种可屏蔽单位
15 Unite Shield: g, ct, lb, oz, ozt, GN, dwt, N, t, T/A/R.....
- 电池驱动
Battery Back Up
- 选配下挂钩称重装置
With Under Hook
- 选配内置直流可充电功能
Optional fit with inner rechargeable DC battery
- 选配RS232通讯端口连接外围设备
Fit with RS232 Line
- 选配外接显示器功能
Optional fit with extra display

称量应用模式 APPLICATION MODE

- 百分比称重功能
Percentage Weighing Function
- 设定物体称量计数功能
Selectable Weighing and Counting Mode



HJC-A

主要技术指标 SPECIFICATIONS

型号 Item NO.	量程 Weighing Range(g)	可读性 Readability (mg)	重复性 Repeatability (mg)	线性误差 Linearity (mg)	操作温度范围 Surrounding (°C)	称盘尺寸 Pan Size (mm)	外形尺寸 (长*宽*高) Housing(L*W*H) (mm)	开机预热 Warm-up time (分钟/m)
HJE/HJC-A100	100							
HJE/HJC-A200	200	1	±2	±2	22±7.5	Φ85	300*195*315	10-20
HJE/HJC-A300	300							
HJE/HJC-B200	200							
HJE/HJC-B300	300							
HJE/HJC-B500	500		±0.01	±0.02		Φ138	300*195*315	
HJE/HJC-B600	600	0.01			10-36		300*195*100	10-20
HJE/HJC-B1000	1000							
HJE/HJC-B2000	2000		±0.02	±0.03				
HJE/HJC-B3000	3000					156*156		
HJE/HJC-C1000	1000					Φ138		
HJE/HJC-C2000	2000							
HJE/HJC-C3000	3000							
HJE/HJC-C5000	5000	0.1	±0.1	±0.2	10-36		300*195*100	10-20
HJE/HJC-C6000	6000					168*168		
HJE/HJC-C10000	10000							